



## 55" Touch Standee AIO Windows Digital Signage


2024.08



## Specification

|                      |  |  |
|----------------------|--|--|
|                      | Model  | NC-A24D-55GT   |
| Screen               | Size   | 55 inch  |
|                      | Viewing Size   | 1209.6 X 680.4 mm                                    |
|                      | Brightness   | 300 cd/m <sup>2</sup>                                |
|                      | Backlight  | WLED   |
|                      | Aspect Ratio   | 9:16   |
|                      | Resolution   | 1080 X 1920  |
|                      | Contrast   | 1200:1   |
|                      | View Angle   | Full Angle 178°                                      |
|                      | Color  | 16.7M , 70% NTSC                                     |
| Touch Screen         | Touch Tech   | Infrared Touch Screen Technology                     |
|                      | Touch Points   | 10 Points  |
|                      | Positioning Accuracy                                       | More than 90% of the touch area (±2mm)               |
|                      | Hardness   | >6H  |
| System Configuration | Processor  | Celeron J6412 (Quad-core, 1.5M Cache up to 2.60 GHz) |
|                      | Graphics Card  | Built-in   |
|                      | RAM  | 8GB  |
|                      | Storage  | 128GB  |
|                      | OS   | Windows 11 Pro                                       |
| Speaker              | Built-in 8Ω 5W X2  |  |
| Network              | Wired / Wireless 802.11b/g/n                               |  |
| Bluetooth            | 5.0  |  |
| Ports                | DC*1 / USB*4 / RJ45*1 / VGA*1<br>/ COM*1 / AUDIO*1 / MIC*1 |  |
| Power                | AC 110V~240V <145W   |  |
| Product Size         | Host: 727.8mm x 1850mm x 86.2mm<br>Base: 728mm x 450mm     |  |
| Packaging Size       | 1968x 860x 160 mm  |  |
| Weight               | 47KG (Gross Weight: 55KG)                                  |  |
| Protection Glass     | 4mm Fully Tempered Glass                                   |  |
| Working Temperature  | 0°C~50°C   |  |
| Working Humidity     | 30%~70   |  |
| Storage Temperature  | -20°C ~ 60°C   |  |
| Storage Humidity     | 30%~70%  |  |

## Size

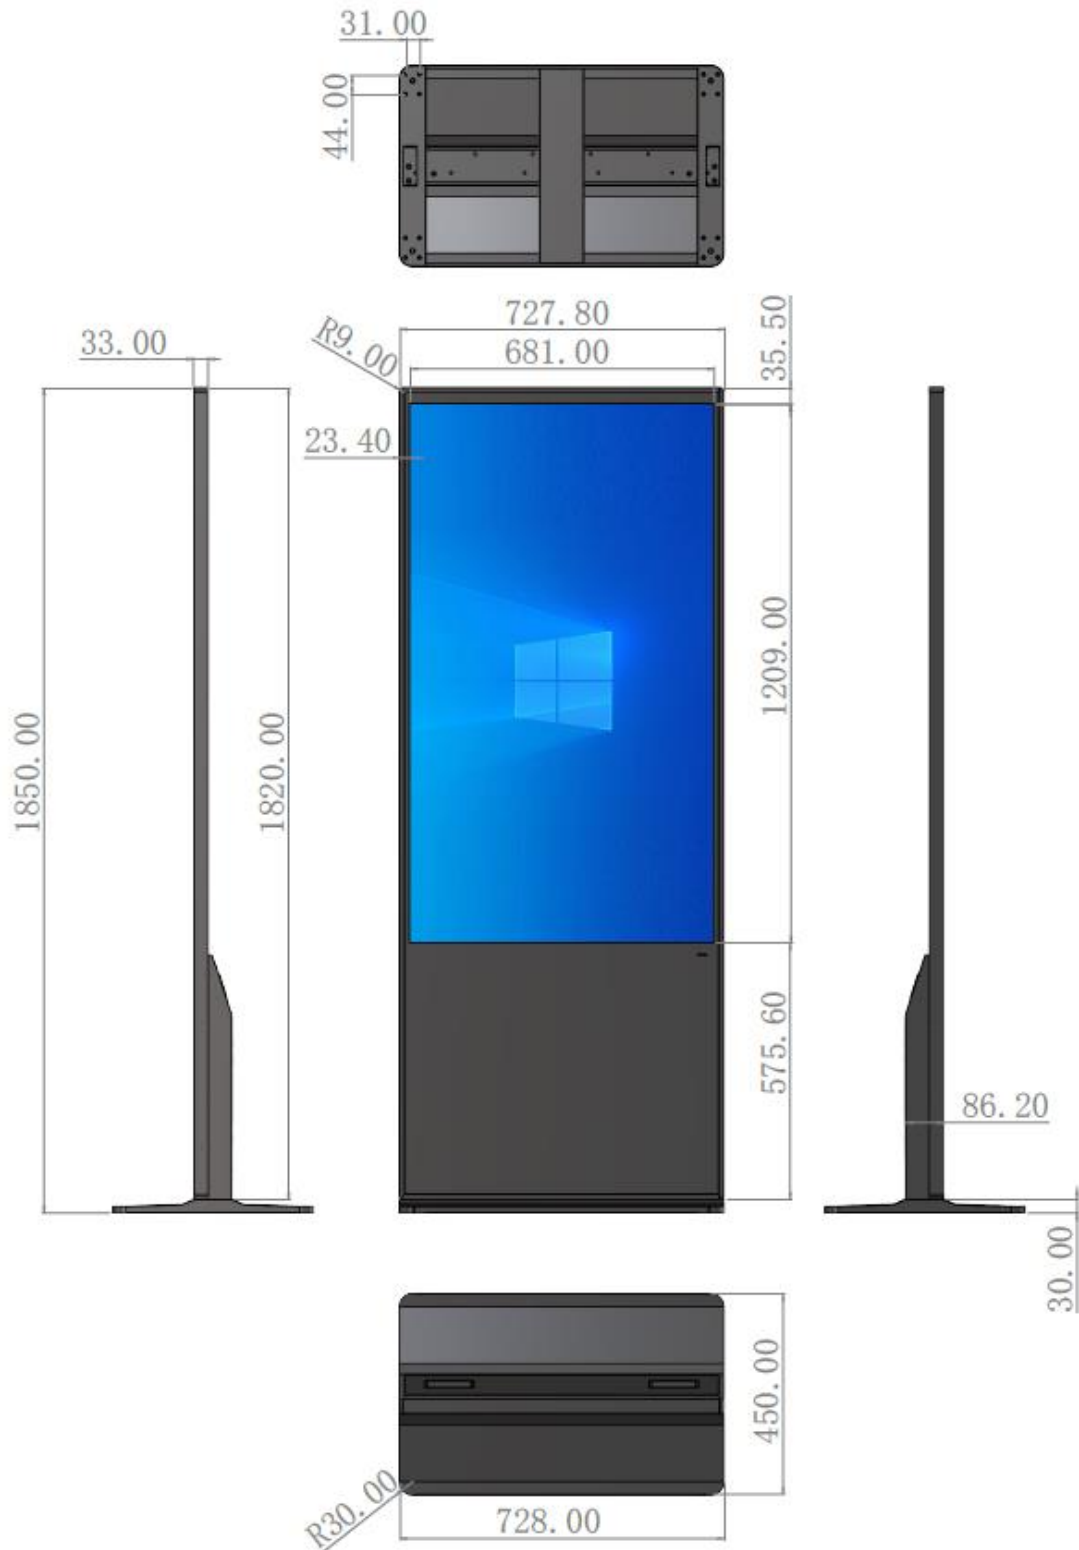

We welcome inquiries and cooperation from decoration companies, designers, dealers, and system integrators.

<https://mysmartscheduler.com/>

[sales@nugestech.com](mailto:sales@nugestech.com)